

## Indoor Absorbent



### 380 SWISSLON™

#### Category Information

Premium quality barrier matting, designed to remove walked-in moisture and finer dirt particles in large indoor entrance areas, including wall-to-wall applications.

Unsurpassed ability to retain moisture (>5 litres per m<sup>2</sup>) and scrape debris from foot traffic while maintaining its great looking appearance for the longest time.

A dense heavyweight vinyl backing ensures longevity and minimum movement.

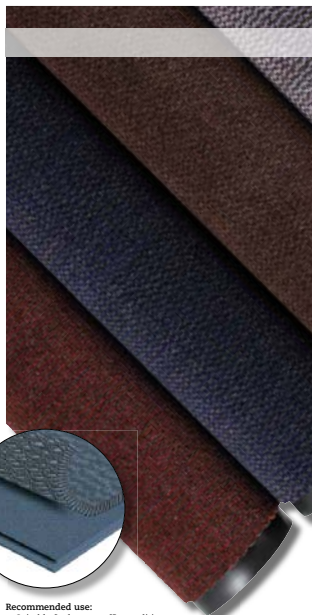

#### Recommended use:

- Suitable for heavy traffic conditions.
- For placement inside larger entrances at hotels, public buildings, schools, universities, hospitals, department stores, banks, restaurants.

#### Specifications:

- Densely tufted cut loop pile (85 500 tufts per m<sup>2</sup>) consisting of 100% polyamide yarns.
- 950 grams of yarn per m<sup>2</sup>
- Backing: black vinyl (DOP free).
- Synthetic rubber waffle backing available on demand.
- Overall thickness: 9.4 mm.
- Weight: 3.8 kg per m<sup>2</sup>.
- Fire retardancy: ASTM D2859 passes DOC-FF-1-70, EN 13501-1 Bfl-S1.

#### Cleaning Tip:

Vacuum/shampooing or use extraction method to clean.

[www.notrax.com](http://www.notrax.com)

## Contract



#### Full rolls:

- 130 cm x 20 meter
- 200 cm x 20 meter

#### Custom lengths:

- 130 cm per linear meter
- 200 cm per linear meter

#### Colours:

- Charcoal, Red, Brown,
- Blue, Blue-grey

[www.notrax.com](http://www.notrax.com)

